

# ALTO Podium System

<b>ISSUE</b> 01	<b>DATE</b> May 17	<b>PAGE</b> 1 of 2
-----------------	--------------------	--------------------

## Overview

The new Alto Podium System is fully certified to BS 8620:2016. Completely redesigned, extensively tested in-house and externally certified by a leading UK laboratory, the new Alto Podium sets new standards for safety at height and performance.

The Alto Podium System sets itself apart from the competition with one podium and three boosters to cover platform heights from 0.5m to 2.25m. Podiums can be released from, or added to boosters to meet changes in demand. The platform and steps can be stowed in secure, convenient locations on the podium unit. Innovative in-built stabilisers are included in the podium frame and all booster variants.

All fully-assembled combinations fit through a standard doorway, and once the podium is finished with, can be folded closed separately or left assembled for ease and convenience.

## Specification

<b>SYSTEM STANDARD</b>	BS 8620:2016
<b>PLATFORM SIZE</b>	600mm x 500mm
<b>PLATFORM HEIGHTS</b>	0.5m, 0.75m, 1.0m, 1.25m, 1.5m, 1.75m, 2.0m, 2.25m
<b>SAFE WORKING LOAD</b>	150kg
<b>STABILISERS</b>	Multi-position Integral auto-locking on Podium & Boosters
<b>BRACES</b>	Integrated arms with pin-locking connection
<b>FEET</b>	Heavy duty high friction non-marking rubber
<b>WHEELS</b>	Offset, non-marking polypropylene
<b>TOEBOARD</b>	Optional aluminium toeboard set available



### Lakeside Industries Ltd

Unit 19 Howard Road, Park Farm Industrial Estate, Redditch, Worcestershire. B98 7SE  
 +44(0)1527 500577 | sales@lakeside-industries.co.uk | www.altoaccess.com

<b>ISSUE</b> 01	<b>DATE</b> May 17	<b>PAGE</b> 2 of 2
-----------------	--------------------	--------------------

## Key Features

### Unrivalled Strength

Made with 2mm thick extruded tubes, robust heavy duty non-marking rubber feet and secure fastening systems, the Alto Podium system is designed to survive in the most demanding environments.

### Economical Variation

The unique booster system allows maximum utilisation. Attaching a podium to any one of the three boosters gives a height coverage of 0.5m to 2.25m.

- Podium only - 0.5m & 0.75m
- Podium & Booster No.1 - 0.5m, 0.75m, 1.0m & 1.25m
- Podium & Booster No.2 - 0.5m, 0.75m, 1.5m & 1.75m
- Podium & Booster No.3 - 0.5m, 0.75m, 2.0m & 2.25m

### Ultimate Stability


Able to withstand side loads of up to 30kg in all configurations thanks to integral stabilisers, the Alto Podium sets new standards for podium performance.

### Class-leading Loadings

Although limited by the Standard to a maximum working load of 150kg, the Alto podium has been tested to loads in excess of 300kg.

### Flexible & Portable

The Alto Podium will fit through a standard door either folded or unfolded and the unit is highly manoeuvrable on its offset wheels.

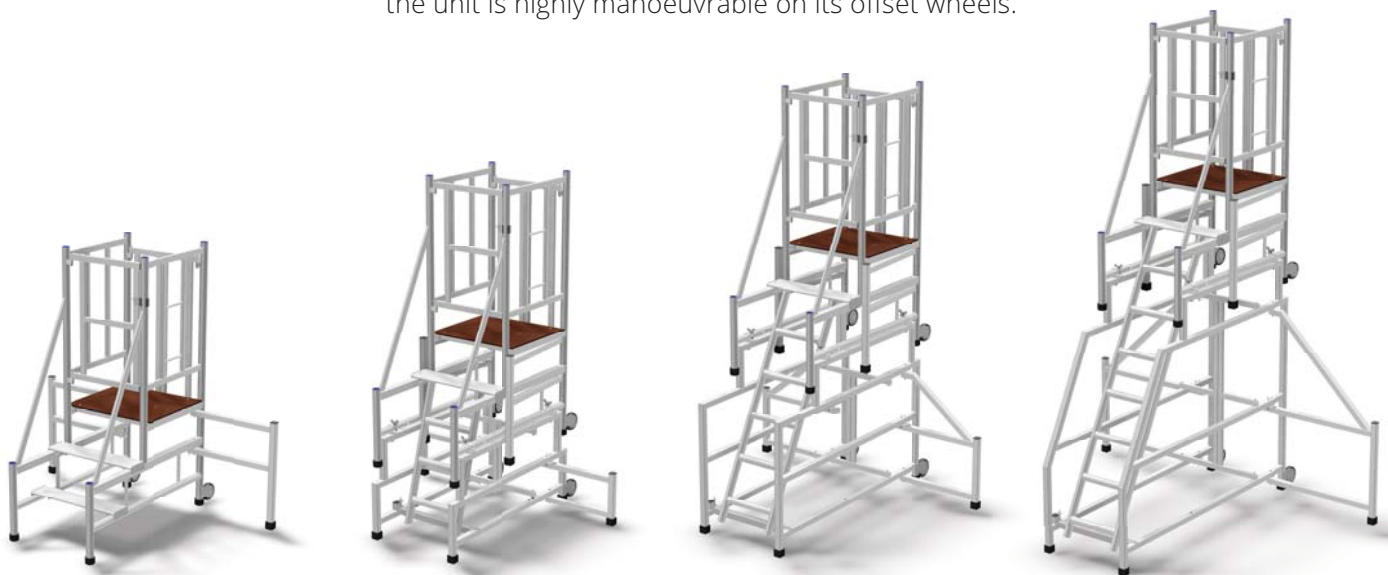

## Lakeside Industries Ltd

Unit 19 Howard Road, Park Farm Industrial Estate, Redditch, Worcestershire. B98 7SE  
 +44(0)1527 500577 | sales@lakeside-industries.co.uk | www.altoaccess.com



@lakesideindust



@altotowers



lakeside-industries-ltd